



® 4242 Baldwin Boulevard
 Corpus Christi, Texas
 USA 78405-3399
 Tel: 800-531-3111, 361-888-5591
 Fax: 800-531-3108, 361-888-6510
 www.hortondoors.com
 The Automatic Choice

ARCHITECTURAL DETAILS

REVOLVING DOOR ENTRANCES

AutoFlow® Automatic Series 9331

F2.8

Type: 3-Wing with Segmented® Drum, Medium Stile

Jan 15

Standard Packages




| Nominal Inside Diameter | Outside Diameter | Entry | Rough Opening Width x Height |
|--|-------------------|------------------|---|
| 10'-0" (3048) | 10'-3 1/2" (3137) | 4'-4 3/8" (1330) | 10'-4" (3150) x 8'-0 1/4" (2445) |
| Overall Unit Height: 8'-0" (2438) | | | Anodized Finish: Clear or Dark Bronze |
| Ceiling Height: 7'-0" (2134), Canopy Height: 12" (305) | | | |
| Glassing: Standard unit prep'd for 1/4" (6) glass. Glass by others. | | | |

- Options** ● Ceiling lights ● Custom anodized or paint finish ● Ceiling height up to 8'-0"
 ● Aluminum roof ● Extended or cropped canopy

For more standards & options see **Architectural Specs (p.F5.0)** and **Spec Details (p. F3.0)**.

Installation and Operation

- Door unit is surface mounted to finish floor (floor not to exceed 1/4" out of level). Unit is free-standing with no additional support required.
- Drum can be center connected to adjacent construction or throat connected (at entry vertical rails). Allow 1/4" shim space each side & at canopy. Adjacent construction not to bear down on revolving door.
- Motion sensor at each entry starts wing rotation on user approach at 3-5 RPM. Push plate mounted at door entry slows door to 1-3 RPM for slower traffic.
- Electrical: Provide 120 VAC, 15 amp service on a dedicated 20 amp circuit breaker routed to power operator mounted within the enclosure canopy.

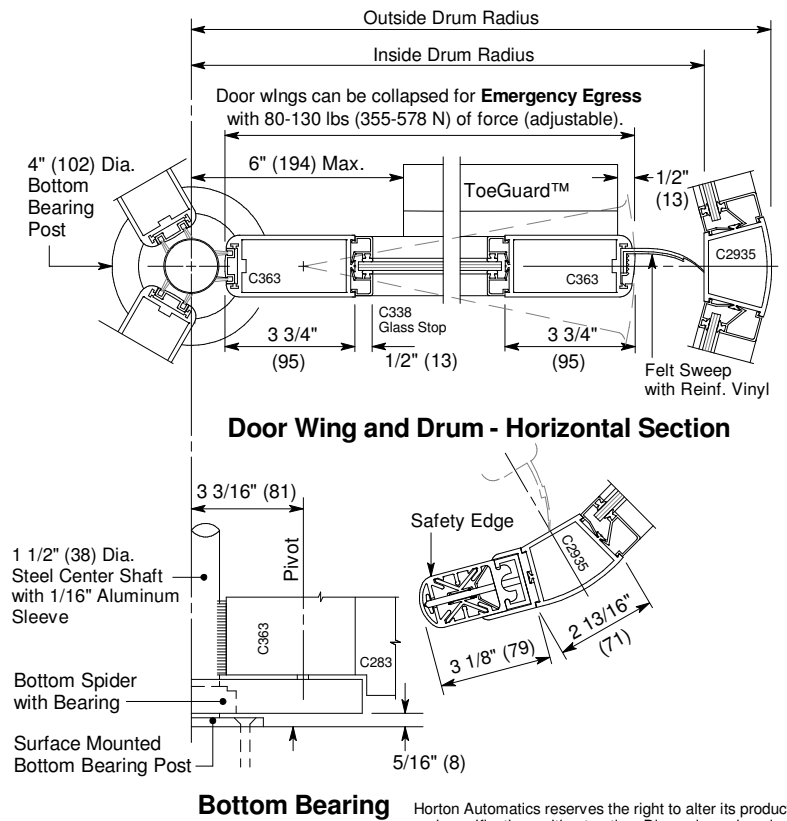

Horton Automatics reserves the right to alter its product and specifications without notice. Dimensions given in U.S. inches followed by millimeters in parenthesis.