



® 4242 Baldwin Boulevard  
 Corpus Christi, Texas  
 USA 78405-3399  
 Tel: 800-531-3111, 361-888-5591  
 Fax: 800-531-3108, 361-888-6510  
 www.hortondoors.com  
 The Automatic Choice

# ARCHITECTURAL DETAILS

## AUTOMATIC COMMERCIAL SLIDE DOORS

ProSlide® Telescoping Series 2003T

A3.22

Type: 010T Single O-X-X or X-X-O

Nov 17

### Standard Packages

Unit Width	Slide Opening	Fast Slide Panel Width	Slow Slide Panel Width	Sidelite Width	Rough Opening Width
7'-0" (2134)	3'- 7 1/2" (1105)	2'- 3 3/4" (705)	2'- 3 1/4" (692)	2'- 6 1/2" (692)	7'-0 1/2" (2146)
8'-0" (2438)	4'- 3 1/2" (1308)	2'- 7 3/4" (806)	2'- 7 1/4" (793)	2'-10 1/2" (793)	8'-0 1/2" (2451)
9'-0" (2743)	4'-11 1/2" (1511)	2'-11 3/4" (989)	2'-11 1/4" (976)	2'- 2 1/2" (976)	9'-0 1/2" (2756)
10'-0" (3048)	5'- 7 1/2" (1715)	3'- 3 3/4" (1010)	3'- 3 1/4" (997)	3'- 6 1/2" (997)	10'-0 1/2" (3061)
12'-0" (3658)	6'-11 1/2" (2121)	3'-11 3/4" (1213)	3'-11 1/4" (1200)	4'- 2 1/2" (1200)	12'-0 1/2" (3670)

**Unit Height:** 7'-6" (2286)    **Rough Opening Height:** 7'-6 1/4" (2292)  
**Glazing:** Standard unit prep'd for 1/4" (6) glass. Glass by others.    **Anodized Finish:** Clear or Dark Bronze


### Options

- Custom unit widths between 7'-0" & 12'-0".
- Custom mid-rails, bottom rails and jambs.
- Transom or threshold.
- Medium or wide stile construction (slide opening will be reduced).
- Custom anodized or paint finish or stainless steel cladding

See details for options starting on p. A5.0 and Architectural Specifications on p. A7.7.

### Installation and Operation


- Door perimeter mounted within rough opening with 1/4" minimum shim space at header & jambs. Finish floor not to exceed 1/4" out of level. (See page A.3)
- Electrical: Provide 120 VAC, 60 cycle, single phase, 15 amp service (in conduit) to each unit on dedicated 20 amp circuit breaker routed to header. Maximum current draw is 3.15 amps.
- Door actuated with header mounted motion sensor at interior and exterior for detection of traffic in each direction. Door closes after time delay expires. (See page A.4)
- Manual Locking: Exterior keylock and interior thumbturn provided at vertical strike rail. (Optional fail-safe or fail-secure autolock)

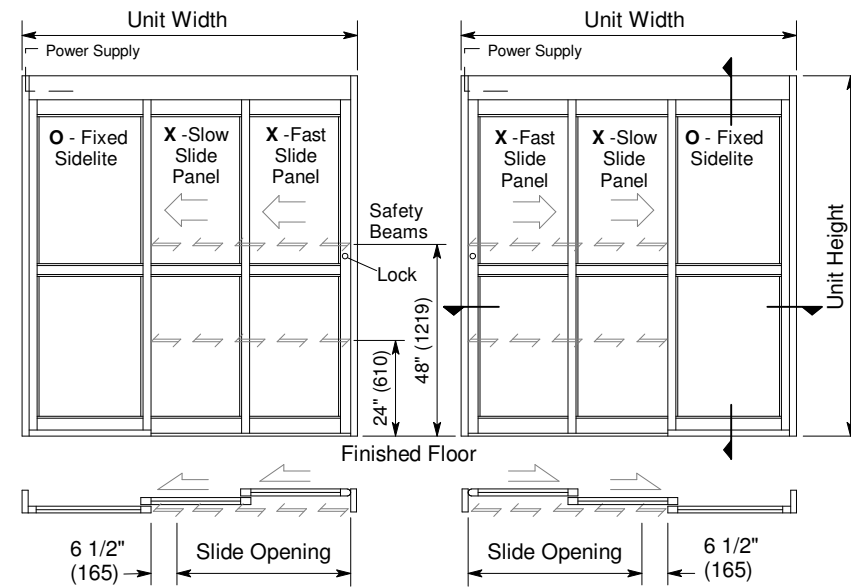


Type O-X-X

Exterior Elevations and Floor Plans

Type X-X-O

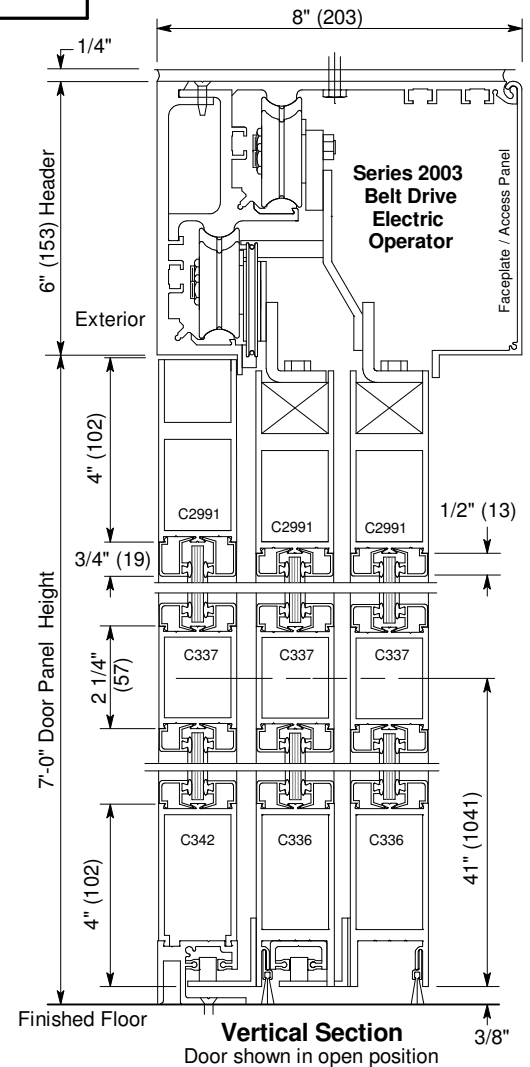

Vertical Section  
 Door shown in open position

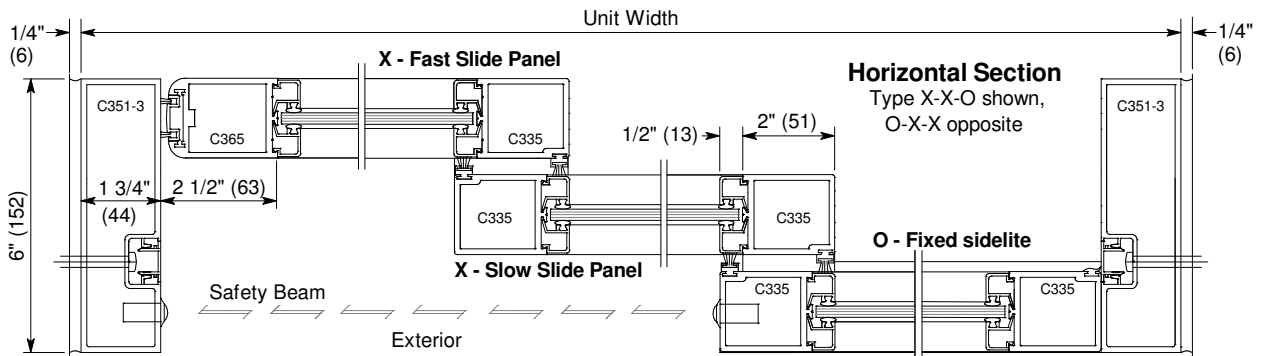

Horizontal Section

Type X-X-O shown,  
 O-X-X opposite