

Standard Packages

Unit Width	Slide Opening	Wall Opening Width	Slide Panel Width
8'-0" (2438)	3'-0" (914)	3'-7" (1092)	2'-0" (610)
9'-0" (2743)	3'-6" (1067)	4'-1" (1245)	2'-3" (686)
10'-0" (3048)	4'-0" (1219)	4'-7" (1397)	2'-6" (762)
12'-0" (3658)	5'-0" (1524)	5'-7" (1702)	3'-0" (914)
14'-0" (4267)	6'-0" (1829)	6'-7" (1829)	3'-6" (1067)
16'-0" (4877)	7'-0" (2134)	7'-7" (2311)	4'-0" (1219)

Unit Height: 7'-8" (2337) **Anodized Finish:** Clear or Dark Bronze
Glazing: Standard unit prep'd for 1/4" (6) glass. Glass by others.
Threshold: 1/2" (13) tall x 4" (102) wide (See page A5.3).


Options

- Custom unit widths between 8'-0" & 16'-0".
- Custom unit height to 8'-8".
- Custom mid-rails, bottom rails and jambs.
- Medium or wide stile construction (slide opening will be reduced).
- Custom anodized or paint finish or stainless steel cladding.

See Architectural Specifications on p. A8.0 and Specification Details starting on p. A5.0.


Installation and Operation

- Door unit is surface mounted onto interior of finished wall. Finish floor not to exceed 1/4" out of level. (See page A.3)
- Electrical: Provide 120 VAC, 60 cycle, single phase, 15 amp service (in conduit) to each unit on dedicated 20 amp circuit breaker routed to header. Maximum current draw is 3.15 amps.
- Door actuated with motion sensor mounted over door opening at interior and exterior for detection of traffic in each direction. Door closes after time delay expires. (See page A.4)
- Manual Locking: Exterior keylock and interior thumbturn provided at RH vertical strike rail. (Optional fail-safe or fail-secure autolock)

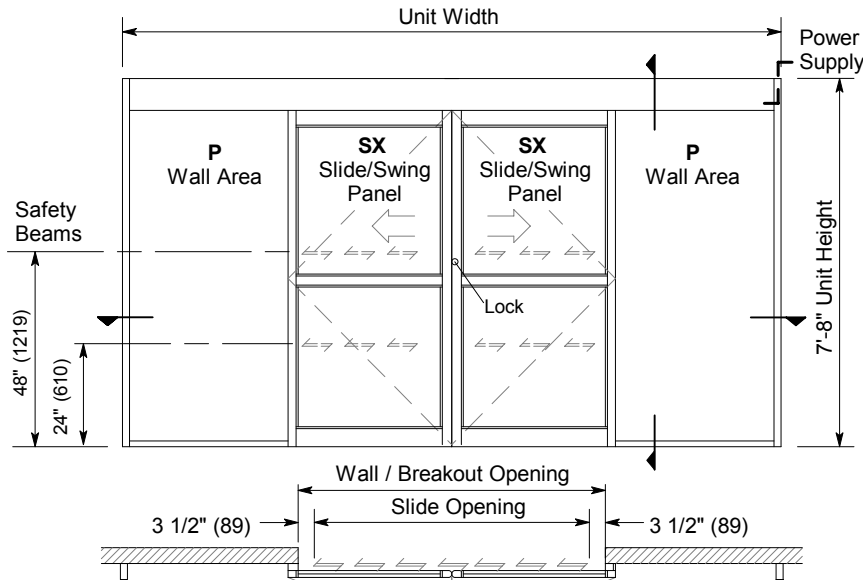


SX panels can breakout 90° from any position of slide movement with max. 50 lbf. of force at lock stile.

Exterior Elevation and Floor Plan

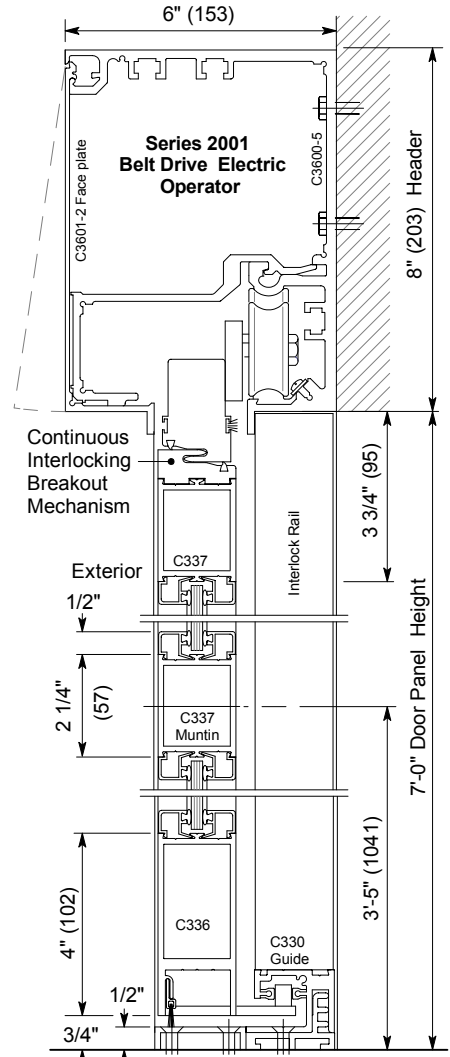

Vertical Section
Door shown in open position

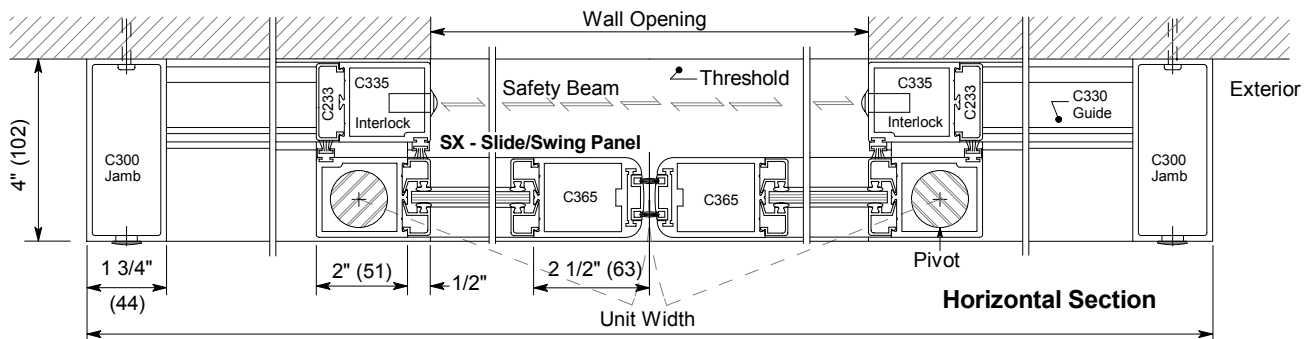

Horizontal Section