



® 4242 Baldwin Boulevard  
 Corpus Christi, Texas  
 USA 78405-3399  
 Tel: 800-531-3111, 361-888-5591  
 Fax: 800-531-3108, 361-888-6510  
 www.hortondoors.com  
 The Automatic Choice

# ARCHITECTURAL DETAILS

## MANUAL SLIDE DOORS - ICU / CCU

### Profiler-ICU® Telescoping

A10.1.2

### Type: 010 Single O-X-X or X-X-O

Nov 16

#### Standard Packages

Unit Width	Slide Opening	1st Slide Panel Width	2nd Slide Panel Width	Sidelite Width	Rough Opening Width
7'-0" (2134)	4' - 2" (1270)	2'-4" (711)	2'- 3 1/2" (699)	2'- 6" (762)	7'-0 1/2" (2146)
8'-0" (2438)	4'-10" (1473)	2'-8" (813)	2'- 7 1/2" (800)	2'-10" (864)	8'-0 1/2" (2451)
9'-0" (2743)	5' - 6" (1676)	3'-0" (914)	2'-11 1/2" (902)	3'- 2" (965)	9'-0 1/2" (2756)
10'-0" (3150)	6' - 2" (1879)	3'-4" (1016)	3'- 3 1/2" (1003)	3'- 6" (1067)	10'-0 1/2" (3061)
11'-0" (3353)	6'-10" (2083)	3'-8" (1118)	3'- 7 1/2" (1105)	3'-10" (1168)	11'-0 1/2" (3353)
12'-0" (3658)	7' - 6" (2286)	4'-0" (1219)	3'-11 1/2" (1207)	4'- 2" (1270)	12'-0 1/2" (3670)

**Unit Height:** 7'-2 1/2" (2197)    **Rough Opening Height:** 7'-2 3/4" (2203)    **Anodized Finish:** Clear or Dark Bronze

**Glazing:** Standard unit prep'd for 1/4" (6) glazing.


#### Options

- Positive Latching (p. A11.1)
- Custom unit widths between 7'-0" & 12'-0".
- Custom unit height to 8'-2 1/2".
- Custom mid-rails & bottom rails (p.A5.4) and jambs (p. A5.2).
- Medium stile construction (slide opening reduced by 1").
- Wide stile construction (slide opening reduced by 2 1/4").
- Custom anodized, paint or stainless steel cladding.
- Custom glazing from 5/8" to 1" (p.A5.5).

For Architectural Specifications see pages A12.0 thru A12.3.

#### Installation and Operation


- Door perimeter mounted within curtainwall or rough opening with 1/4" minimum shim space at header & jambs. Finish floor not to exceed 1/4" out of level.
- Sliding panel rolls on nylon covered track at header for quiet, smooth, anti-friction operation.
- Standard sliding panel (X) glazed with 1/4" tempered glass (shown) can be opened with 8 to 12 lbs of force.

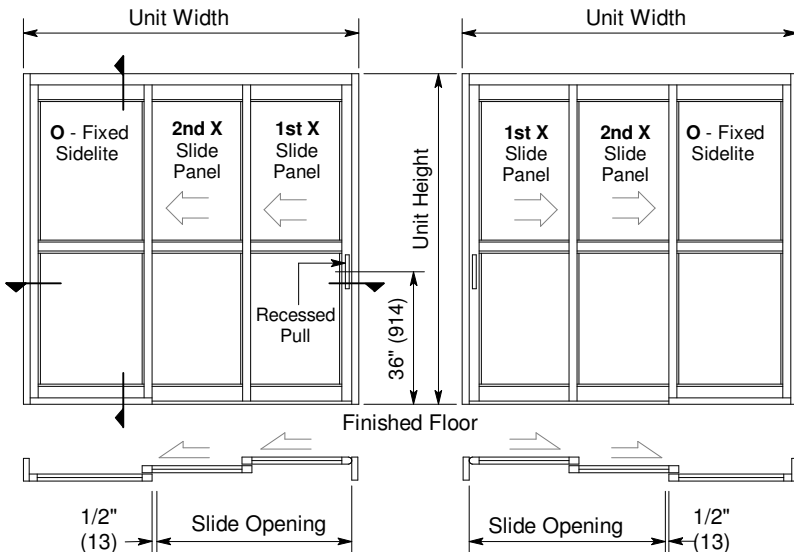

Type O-X-X


Exterior Elevations and Floor Plans

Type X-X-O

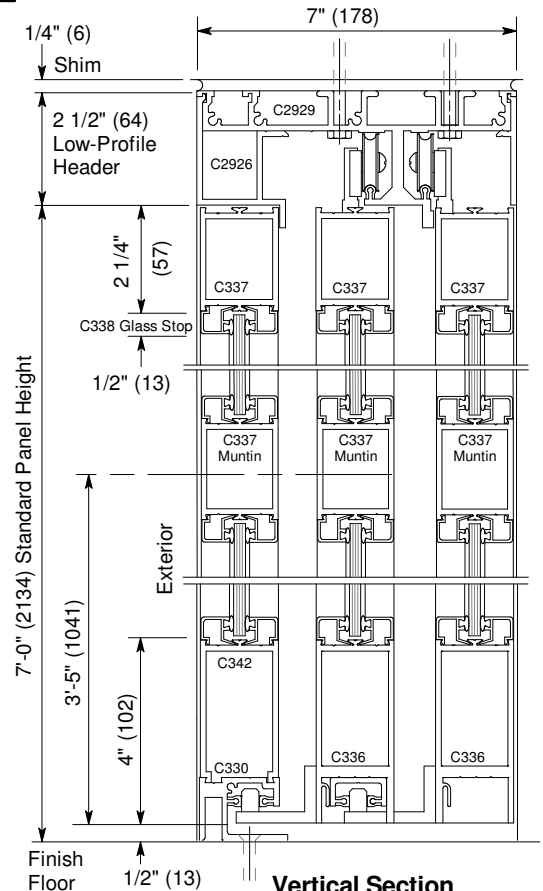

Vertical Section

Door shown in open position

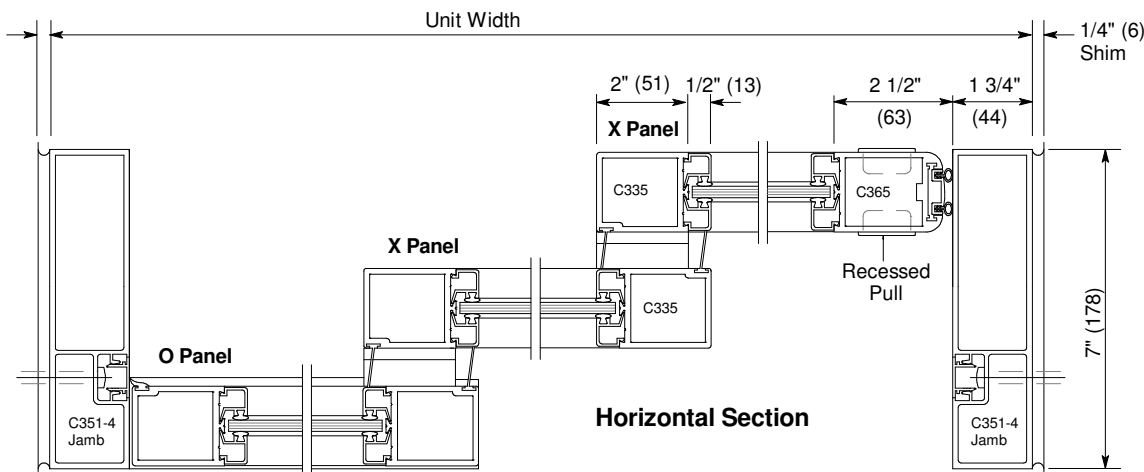

Horizontal Section