

Standard Packages

Unit Width	Slide Opening	Slide Panel Width	Sidelite Width	Rough Opening Width
8'-0" (2438)	3'-0" (914)	2'-0" (610)	2'-0 1/2" (622)	8'-0 1/2" (2146)
9'-0" (2743)	3'-6" (1067)	2'-3" (686)	2'-3 1/2" (699)	9'-0 1/2" (2756)
10'-0" (3048)	4'-0" (1219)	2'-6" (762)	2'-6 3/4" (781)	10'-0 1/2" (3061)
12'-0" (3658)	5'-0" (1524)	3'-0" (914)	3'-0 3/4" (933)	12'-0 1/2" (3670)
14'-0" (4267)	6'-0" (1829)	3'-6" (1067)	3'-6 3/4" (1086)	14'-0 1/2" (4280)
16'-0" (4877)	7'-0" (2134)	4'-0" (1219)	4'-0 3/4" (1238)	16'-0 1/2" (4890)

Unit Height: 7'-2 1/2" (2197)	Anodized Finish: Clear or Dark Bronze
Rough Opening Height: 7'-2 3/4" (2203)	
Glazing: Standard unit prep'd for 1/4" (6) glazing.	


Options

- Positive Latching (p.A11.1)
- Full Size (4" x 6") Profiler® Header and/or Transom (p.A11.0)
- Custom unit widths between 8'-0" & 16'-0".
- Custom unit height to 8'-2 1/2".
- Custom mid-rails & bottom rails (A5.4) and jambs (p.A5.2).
- Medium stile construction (slide opening reduced by 3").
- Wide stile construction (slide opening reduced by 5 1/2").
- Custom anodized or paint finish or stainless steel cladding.
- Custom glazing from 5/8" to 1" (p.A5.5).


For Architectural Specifications see pages A12.0 thru A12.3.

Installation and Operation


- Door perimeter mounted within curtainwall or rough opening with 1/4" minimum shim space at header & jambs. Finish floor not to exceed 1/4" out of level. (See page A9.2)
- Sliding panels roll on nylon covered track at header for quiet, smooth, anti-friction operation.
- Standard sliding panel (X) glazed with 1/4" tempered glass (shown) can be opened with 8 to 12 lbs of force.
- Finger Safety: When sliding open, strike rail of sliding panel will stop 3 1/2" (89) short of adjacent sidelite. Result is slide opening.

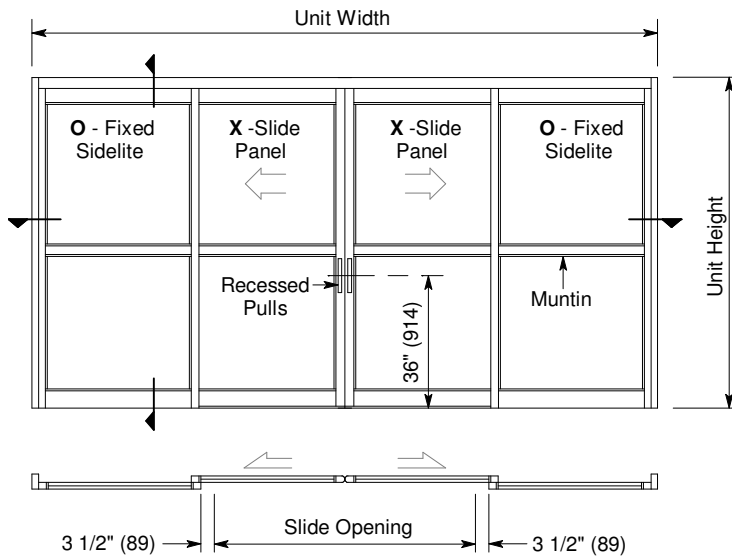

Exterior Elevation and Floor Plan

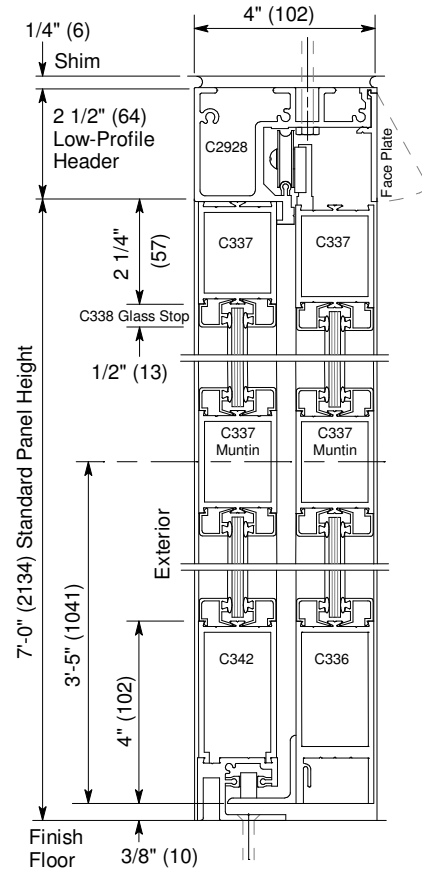

Vertical Section
Door shown in open position

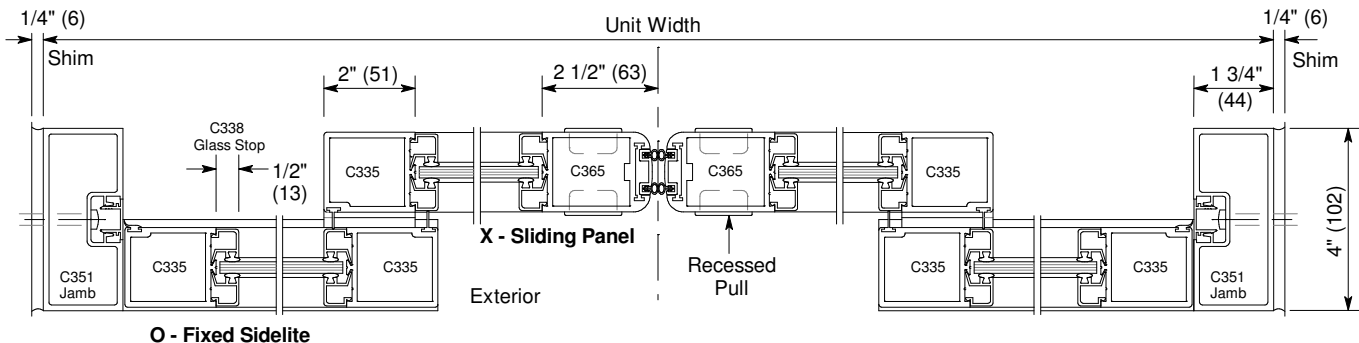

Horizontal Section