



® 4242 Baldwin Boulevard
 Corpus Christi, Texas
 USA 78405-3399
 Tel: 800-531-3111, 361-888-5591
 Fax: 800-531-3108, 361-888-6510
 www.hortondoors.com
 The Automatic Choice

ARCHITECTURAL DETAILS

MANUAL SLIDE DOORS - ICU / CCU

Profiler-ICU® Telescoping

A10.4.3

Type: 110 Biparting O-X-SX-SX-X-O

Nov 16

Standard Packages

Unit Width	Slide Opening	Breakout Opening	Slide/Swing Panel Width	Slide Panel Width	Sidelite Width	Rough Opening Width
8'-0" (2438)	4' - 6" (1372)	2' - 4" (787)	1' - 4 1/2" (419)	1' - 4" (406)	1' - 6 3/4" (476)	8'-0 1/2" (2451)
9'-0" (2743)	5' - 2" (1575)	2' - 8" (813)	1' - 6 1/2" (470)	1' - 6" (457)	1' - 8 3/4" (527)	9'-0 1/2" (2756)
10'-0" (3150)	5'-10" (1778)	3' - 0" (914)	1' - 8 1/2" (521)	1' - 8" (508)	1'-10 3/4" (578)	10'-0 1/2" (3061)
11'-0" (3353)	6' - 6" (1981)	3' - 4" (1016)	1'-10 1/2" (571)	1'-10" (559)	2' - 0 3/4" (629)	11'-0 1/2" (3353)
12'-0" (3658)	7' - 2" (2184)	3' - 8" (1118)	2' - 0 1/2" (622)	2' - 0" (610)	2' - 2 3/4" (679)	12'-0 1/2" (3670)
14'-0" (4267)	8' - 6" (2591)	4' - 4" (1321)	2' - 4 1/2" (724)	2' - 4" (711)	2' - 6 3/4" (781)	14'-0 1/2" (4280)

Unit Height: 7'-2 1/2" (2197) **Rough Opening Height:** 7'-2 3/4" (2203)

Glazing: Standard unit prep'd for 1/4" (6) glazing.

Anodized Finish:
 Clear or Dark Bronze


Options

- Positive Latching (p.A11.1).
- Custom unit widths between 8'-0" & 14'-0".
- Custom unit height to 8'-2 1/2".
- Custom mid-rails & bottom rails (p. A5.4) and jambs. (p.A5.2).
- Medium stile construction (slide opening reduced by 1 1/2").
- Wide stile construction (slide opening reduced by 2 3/4").
- Custom anodized or paint finish or stainless steel cladding.
- Custom glazing from 5/8" to 1" (p. A5.5).

Installation and Operation

- Door perimeter mounted within curtainwall or rough opening with 1/4" minimum shim space at header & jambs. Finish floor not to exceed 1/4" out of level.
- Sliding panel rolls on nylon covered track at header for quiet, smooth, anti-friction operation.
- Standard sliding panels glazed with 1/4" tempered glass (shown) can be opened with 8 to 12 lbs of force. Slide/Swing panel (SX) can swing out min. 90° at full open position requiring no more than 50 lbs of force applied at the strike stile.

For Architectural Specifications see pages A12.0 thru A12.3.

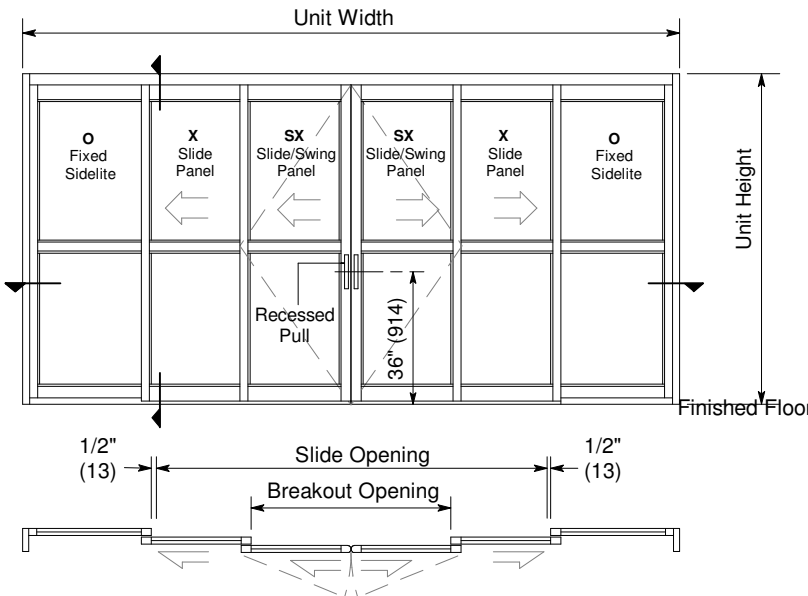

Exterior Elevation and Floor Plan

