



© 4242 Baldwin Boulevard
 Corpus Christi, Texas
 USA 78405-3399
 Tel: 800-531-3111, 361-888-5591
 Fax: 800-531-3108, 361-888-6510
 www.hortondoors.com
 The Automatic Choice

ARCHITECTURAL DETAILS

MANUAL DOORS - ICU / CCU

ICU Bi-Swing™

A10.12

Type: Pair LHR / RH - RHR / RH

Jan 08

Standard Packages

Unit Width	Pair Width	Panels Reach	Swing Opening	Rough Opening Width
6'- 5 1/2" (1969)	6'-0" (1829)	2'-7" (787)	5'-8 1/4" (1733)	6'- 6" (1981)
7'- 5 1/2" (2273)	7'-0" (2134)	3'-1" (940)	6'-8 1/4" (2038)	7'- 6" (2286)
Unit Height: 7'-1 3/4" (2178), Rough Opening Height: 7'-2" (2184) Glazing: Standard unit prep'd for 1/4" (6) glazing.				Anodized Finish: Clear or Dark Bronze


Options

- Hold-Open Closer
- 6" (152) Header
- Medium & Wide Stile Rails
- Pull Handle
- Push Bar in lieu of Muntin Bar
- Custom Glazing, Finishes and Sizes


For standard and optional equipment details see Arch. Specs., page A15.0, and Spec. Details on pages A11.3.

Installation and Operation

- Door perimeter mounted within curtainwall or rough opening with 1/4" minimum shim space at header & jambs. Finish floor not to exceed 1/4" out of level. (See page A9.1)
- Swing panel equipped with overhead concealed double-acting door closer.
- Standard panel glazed with 1/4" tempered glass (shown) can be opened with 4 to 6 lbs of force.

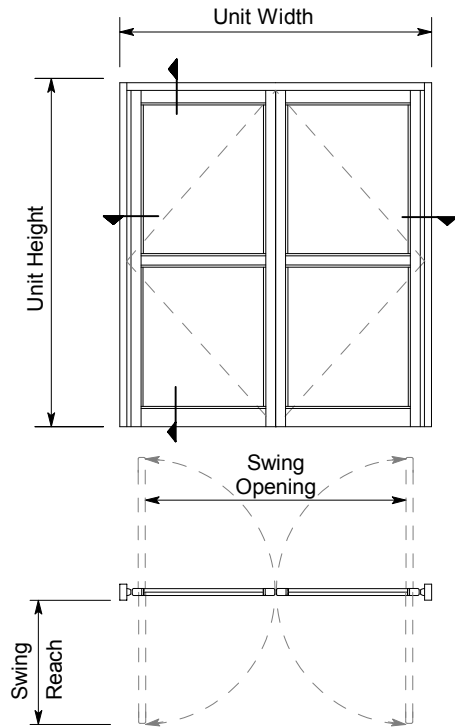


Exterior Elevation and Floor Plan

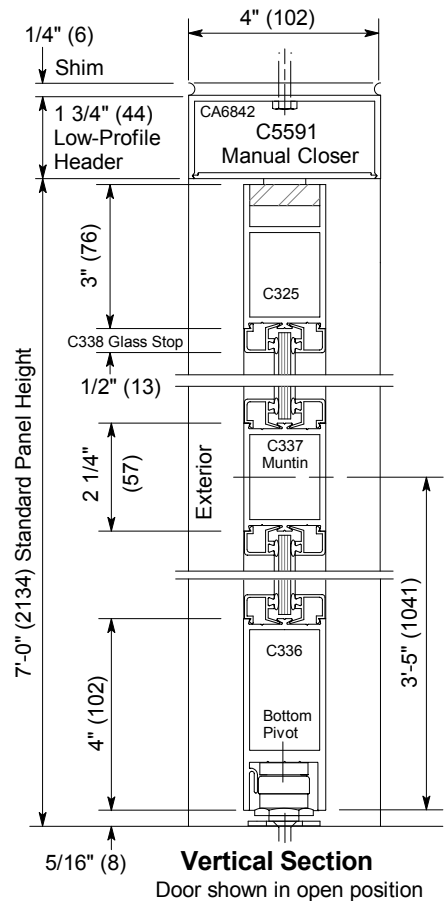

Vertical Section

Door shown in open position

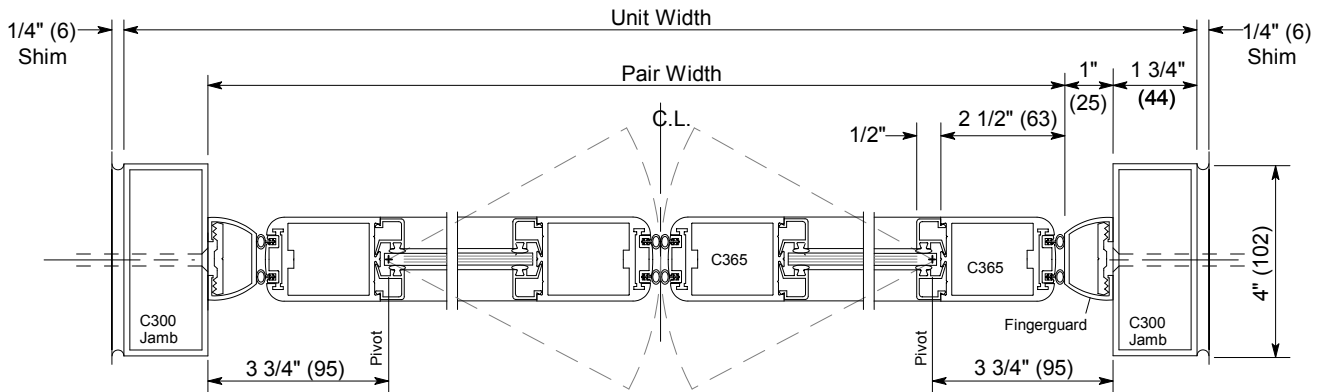

Horizontal Section

Horton Automatics reserves the right to improve the product and change its specifications without notice. Dimensions given in U.S. Inches followed by Millimeters in parenthesis.