Horton AUTOMATICS®
4242 Baldwin Boulevard
Corpus Christi, Texas
USA 78405-3399
Tel: 800-531-3111, 361-888-5591
Fax: 800-531-3108, 361-888-6510
**www.hortondoors.com**
*The Automatic Choice*

# ARCHITECTURAL DETAILS

**X-RAY ROOM - AUTOMATIC SLIDE DOORS**

## HD-Slide® Series 2001-LL

**A10.32**

**Type: Lead-Lined Single Slide P-X or X-P**

May 18

### Standard Packages

| Wall / Clear Slide Opening Width | Slide Panel Width | Unit Width |
|---|---|---|
| 3'-0" (914) | 3'-5" (1041) | 7'-1 1/2" (2171) |
| 4'-0" (1219) | 4'-5" (1346) | 9'-1 1/2" (2781) |
| 5'-0" (1524) | 5'-5" (1651) | 11'-1 1/2" (3391) |
| 6'-0" (1829) | 6'-5" (1956) | 13'-1 1/2" (4001) |

**Unit Height:** 7'-11" (2413) for Typical 7'-0" (2134) Opening
**Slide Panel Height:** 7'-3" (2210) for Typical 7'-0" (2134) Opening
**Finish:** Clad in #4 Brushed Stainless Steel or 18 GA Galvanized Steel.

### Options

- Finish: Header component in 204-R1 Clear Anodize.
- Vision Lite: 7/16" (11) Leaded Glass - Max. 15 3/4" x 15 3/4" (400 x 400). Refer to Specifications and Detail sheet A11.4.
- UPS Battery Back-up: Power Fail-Open or Power Fail-Close.
- Autolock: Fail-Safe or Fail-Secure.

### Installation and Operation

- Unit is surface-mounted onto finished lead-lined wall.
  **Note: Unit is handed viewed from faceplate side.**
- Electrical: Provide 120 VAC, 60 cycle, single phase, 15 amp service to each unit on a dedicated 20 amp circuit breaker routed into header.
- Door opens with (Knowing-Act) manual switch activation device mounted on both sides of opening for operation in each direction. Door closes after time delay expires. Safety Beams then hold door open or recycle door when activated.

**See Architectural Specifications starting on p. A24.1**

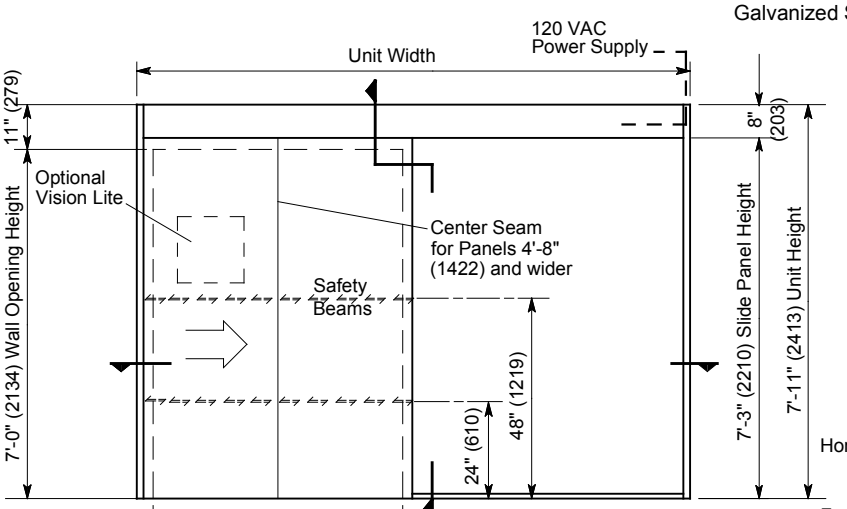


**Elevation**

**Floor Plan**
Type X-P Shown, P-X Opposite
(Viewed from Faceplate Side)

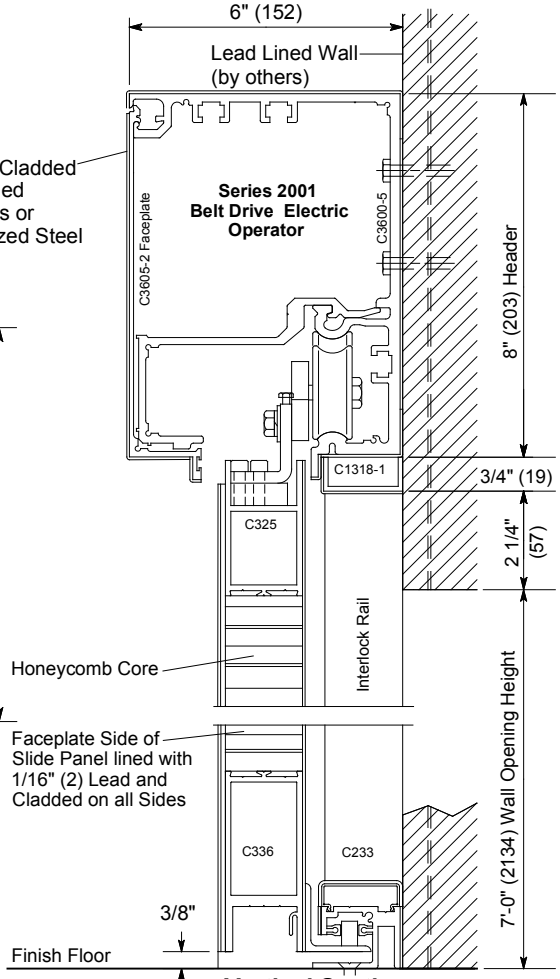


**Vertical Section**
Door Shown in Open Position

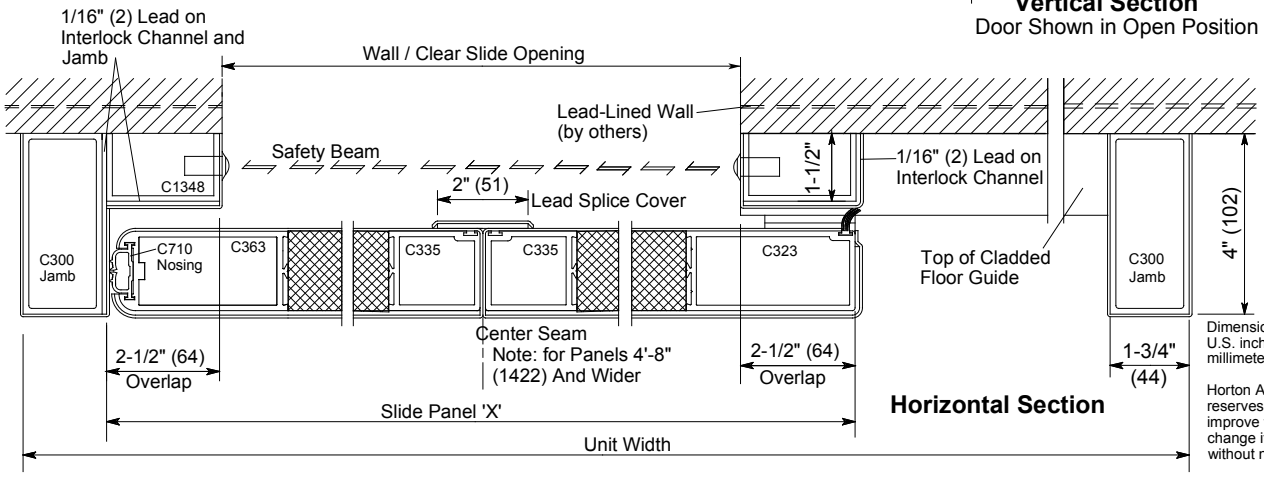


**Horizontal Section**

Dimensions given in U.S. inches followed by millimeters in parenthesis.

Horton Automatics reserves the right to improve the product and change its specifications without notice.