

### Standard Packages

| Unit Width    | Panel Width  | Swing Opening     | Rough Opening Width |
|---------------|--------------|-------------------|---------------------|
| 3'- 4" (1016) | 3'-0" (914)  | 2'- 8 3/8" (822)  | 3'- 4 1/2" (1029)   |
| 3'-10" (1168) | 3'-6" (1067) | 3'- 2 3/8" (974)  | 3'-10 1/2" (1181)   |
| 4'- 4" (1321) | 4'-0" (1219) | 3'- 8 3/8" (1127) | 4'- 4 1/2" (1334)   |


|  |  |
|--|--|
| <b>Unit Height:</b> 7'-2 1/2" (2197)<br><b>Rough Opening Height:</b> 7'-2 3/4" (2203)<br><b>Glazing:</b> Prep for nominal 9/16" (14) glazing | <b>Anodized Finish:</b><br>Clear or Dark<br>Bronze |
|--|--|

### Compliant with:

- **STC-35 Sound Transmission Class Rating**  
In accordance with ASTM E413-04 Classification for Rating Sound Insulation.
- **ASTM E90-04 Standard Test**  
for Laboratory Measurement of Airborne Sound Transmission of Building Partitions and Elements
- **UL 1784 Air Leakage Test of Door Assemblies**
- **NFPA 105 Standard for Installation of Smoke Door Assemblies**

### Installation and Operation

- Door perimeter mounted within curtainwall or rough opening with 1/4" minimum shim space at header & jambs. Finish floor not to exceed 1/4" out of level. Opening to be level & plumb in both directions.
- Panels can swing open 90° after positive latch is released. Panels require max. 30 lbs of force applied at the strike stile to open.
- Door panel rises 5/16" on opening 90°.

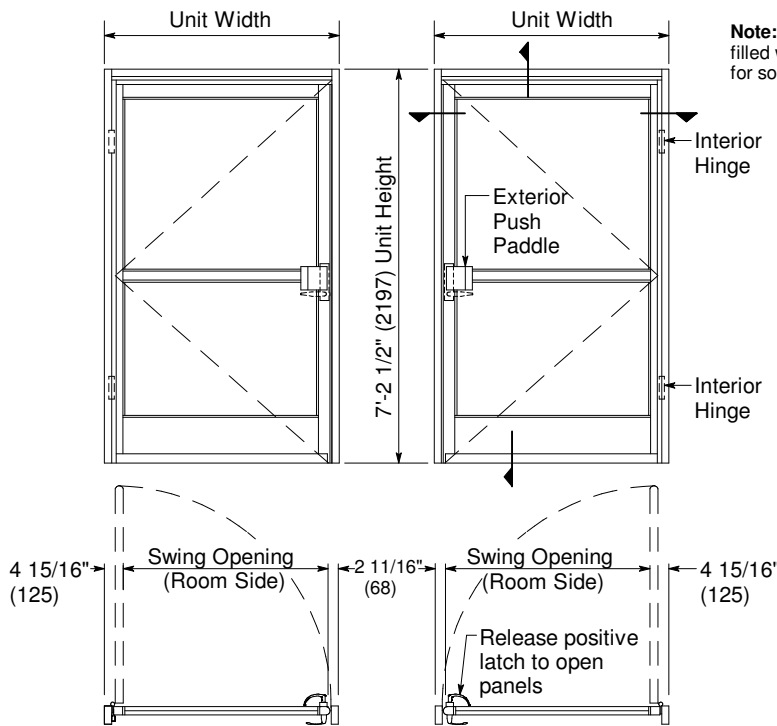

Exterior Elevations and Floor Plans

