



® 4242 Baldwin Boulevard
 Corpus Christi, Texas
 USA 78405-3399
 Tel: 800-531-3111, 361-888-5591
 Fax: 800-531-3108, 361-888-6510
 www.hortondoors.com
 The Automatic Choice

ARCHITECTURAL DETAILS

POWER SWING DOOR OPERATORS

HD-Swing® Series 4100/4100LE Surface Applied
 Single & Pair, Parallel Inswing Arm with Side Access Header

B2.2
 July 10

Standard Packages


Single Units Types: LH, RH		Pair Units Types: LH-RH	
Door Width	Header Width	Door Pair Width	Header Width
3'-0" (914)	3'-3" (991)	5'-0" (1524)	5'-3" (1600)
3'-6" (1067)	3'-9" (1143)	6'-0" (1829)	6'-3" (1905)
		7'-0" (2133)	7'-3" (2210)

Anodized Finish: Clear or Dark Bronze


For additional equipment information see Architectural Specs starting on p. B4.0.

Installation and Operation


- Swing door header is surface mounted onto frame and connecting arm assembly is mounted to face of door panel. Frame and door panel to be provided by others.
- Electrical: Provide 120 VAC, 60 cycle, single phase, 15 amp service (in conduit) to each swing door unit on a dedicated 20 amp circuit breaker routed into header. Maximum current draw is 3.15 amps.

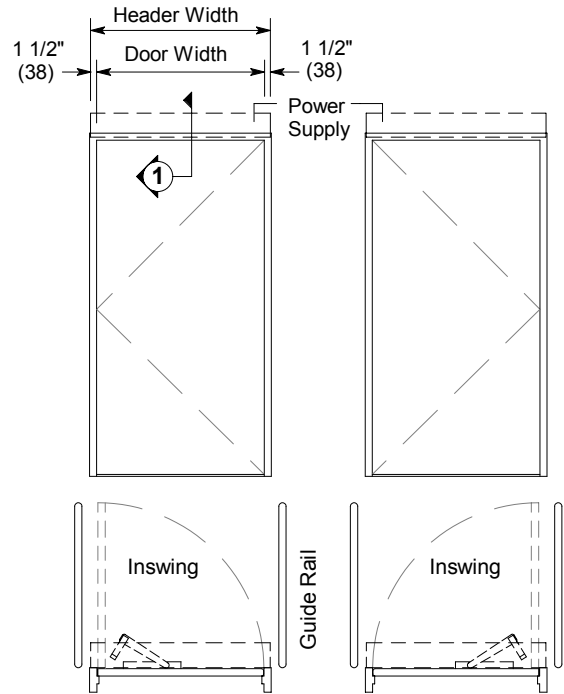


Single Units
Floor Plans with Elevations
 LH & RH

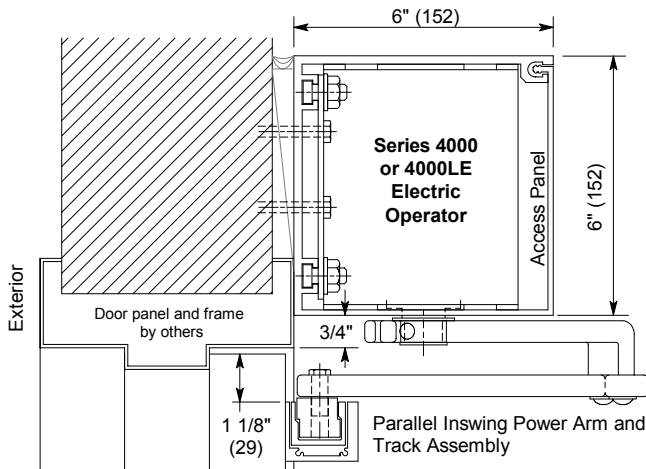

Vertical Section '1'

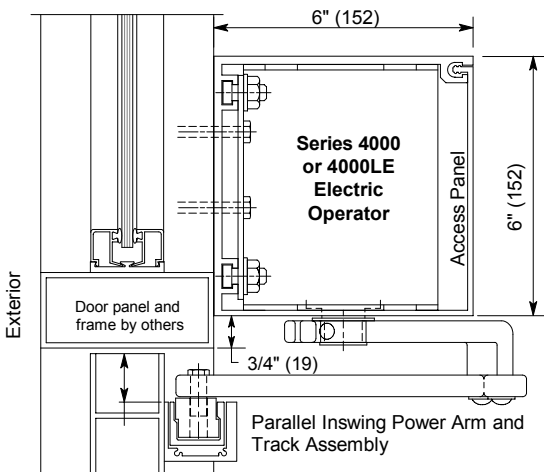

Vertical Section '2'

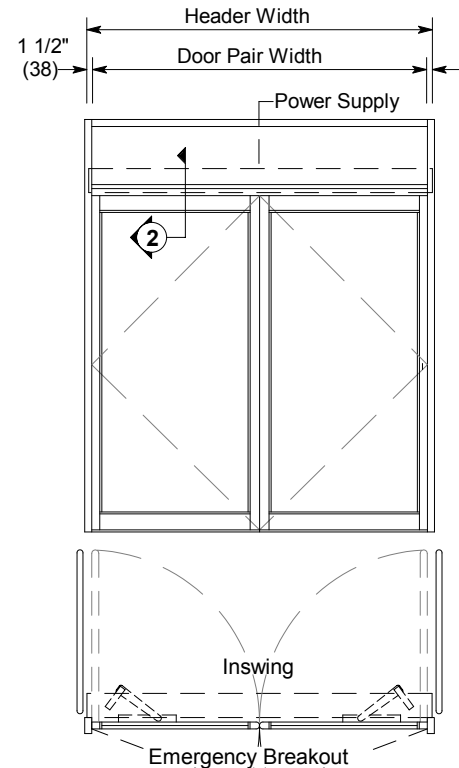

Pair Unit
Floor Plan with Elevation
 LH-RH