



® 4242 Baldwin Boulevard
 Corpus Christi, Texas
 USA 78405-3399
 Tel: 800-531-3111, 361-888-5591
 Fax: 800-531-3108, 361-888-6510
 www.hortondoors.com
 The Automatic Choice

ARCHITECTURAL DETAILS

SWINGING AUTOMATIC ENTRANCES

Overhead Concealed Operators HD-Swing® Series 4800LE Single & Pair Units with Direct Drive

B11.7

July 10

Standard Packages



Single Units			Pair Units		
Types: LH, RH, LHR & RHR			Types: LH-RH & RHR-LHR		
Door Width	Unit Width	Rough Opening Width	Door Pair Width	Unit Width	Rough Opening Width
3'-0" (914)	3' - 4 1/2" (1029)	3' - 5" (1041)	5'-0" (1524)	5'-5 1/2" (1664)	5'-6" (1676)
3'-6" (1067)	3'-10 1/2" (1181)	3'-11" (1194)	6'-0" (1829)	6'-5 1/2" (1969)	6'-6" (1981)
			7'-0" (2133)	7'-5 1/2" (2273)	7'-6" (2286)

Anodized Finish: Clear or Dark Bronze


Installation and Operation

- Header is mounted within frame. Top & bottom pivots are secured to center pivoted door. Doors and frame by others. Finish floor not to exceed 1/4" out of level.
- Electrical: Provide 120 VAC, 60 cycle, single phase, 15 amp service (in conduit) to each swing door unit on a dedicated 20 amp circuit breaker routed into header. Maximum current draw is 3.15 amps.
- Unit to be actuated by push plate or push button switch mounted on each side of opening for two-way traffic.



For additional equipment information see Architectural Specs starting on p. B9.0 and B10.0.

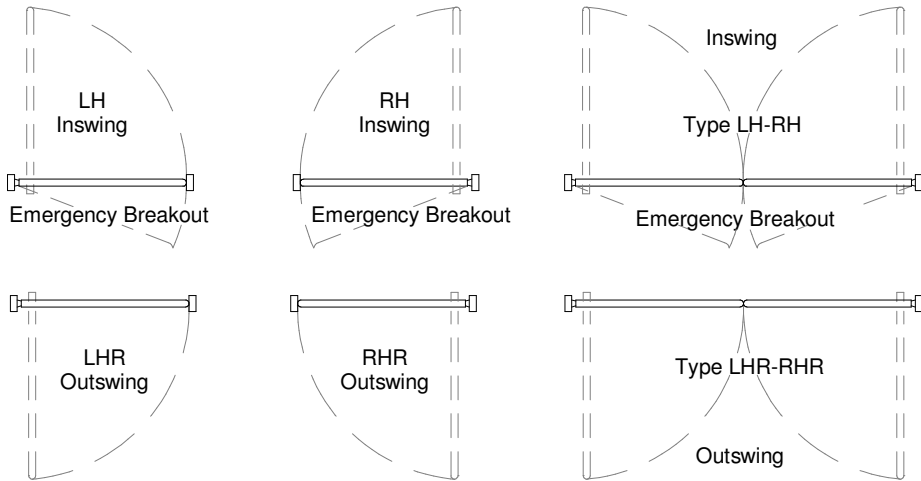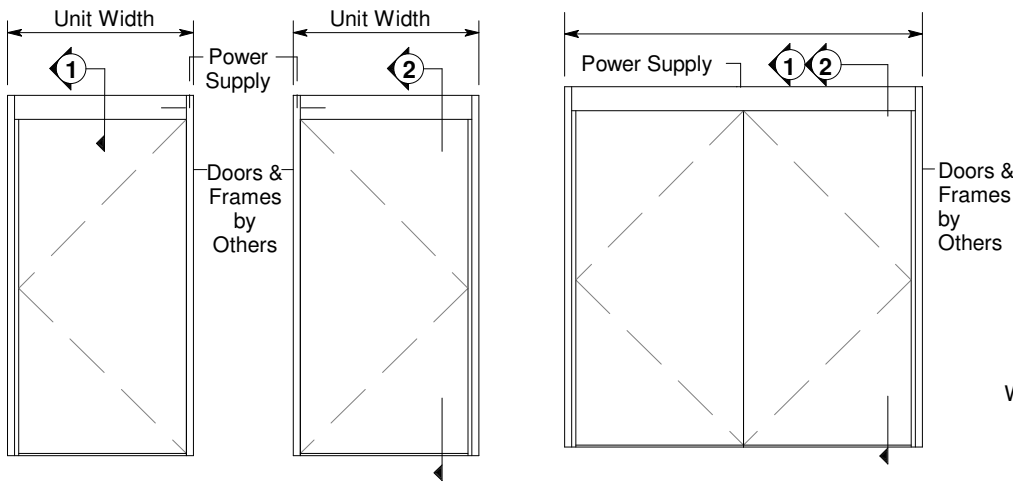

Exterior Elevations and Floor Plans

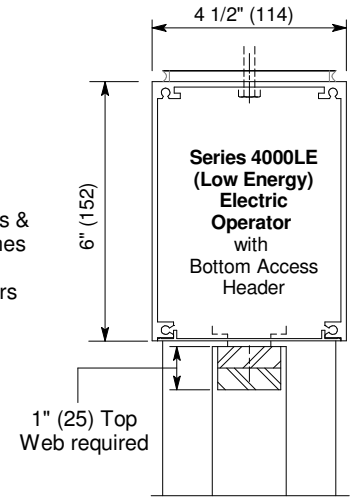

Vertical Section '1'

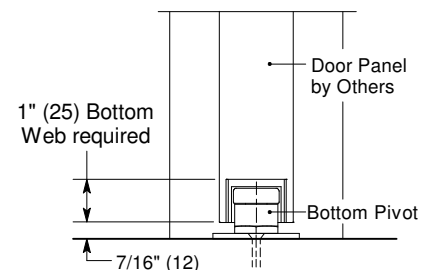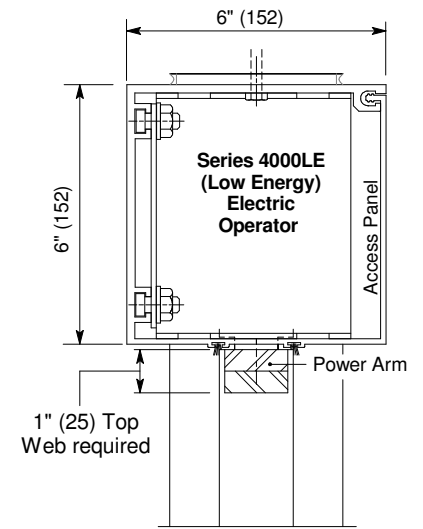

Vertical Section '2'