



® 4242 Baldwin Boulevard
 Corpus Christi, Texas
 USA 78405-3399
 Tel: 800-531-3111, 361-888-5591
 Fax: 800-531-3108, 361-888-6510
www.hortondoors.com
The Automatic Choice

ARCHITECTURAL DETAILS

INDUSTRIAL SLIDE DOORS

RapidSlide®

C2.0

Type: Single Slide P-X or X-P

Sept 16

Standard Packages


Wall Opening Width	Unit Width	Wall Opening Height	Unit Height
6'-0" (1829)	13'-3 1/2" (4013)	8'-0" (2438)	8'-11 5/8" (2733)
7'-0" (2134)	15'-3 1/2" (4623)	9'-0" (2743)	9'-11 5/8" (3038)
8'-0" (2438)	17'-3 1/2" (5232)	10'-0" (3048)	10'-11 5/8" (3343)
9'-0" (2743)	19'-3 1/2" (5842)	12'-0" (3658)	12'-11 5/8" (3953)
10'-0" (3048)	21'-3 1/2" (6452)		
12'-0" (3658)	25'-3 1/2" (7671)		

Overall Panel Width = Wall Opening Width + 8" (203)
Panel Finish : Alpine White, smooth baked on, polyester enamel paint.
Exposed Aluminum Finish : 204R1 Clear anodized.

Includes Single
 12" x 25" Vision Lite on
 Modular 24"
 Door Panel Section

Options:

- Stainless steel or anodized aluminum hood (p.C3.0)
- Power-Fail-Open or Power-Fail-Close
- UPS Battery Back-up
- Autolock (Fail-Safe or Fail-Secure)
- 1/4 HP Motor (in lieu of Std.1/8 HP)
- Additional Vision Lite
- Custom height & width

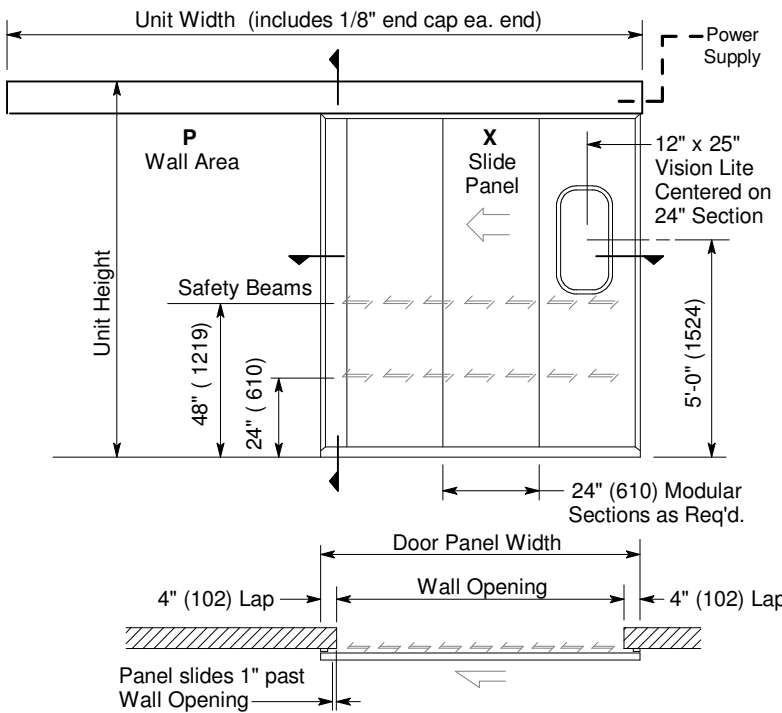

Exterior Elevation and Floor Plan

Type P-X shown, X-P opposite


Installation and Operation

- Door unit is surface mounted onto exterior of finished wall. Finish floor not to exceed 1/4" out of level.
- Electrical: Provide 120 VAC, 60 cycle, single phase, 15 amp service (in conduit) to each unit on dedicated 20 amp circuit breaker routed to header. Maximum current draw is 3.15 amps.
- Actuator mounted on interior and exterior of opening for operation in each direction. Door opens 1" past wall opening. Door closes after time delay expires.

Actuators:


- Push Plate or overhead Motion Sensor

See Architectural Specs. starting on p. C4.0.

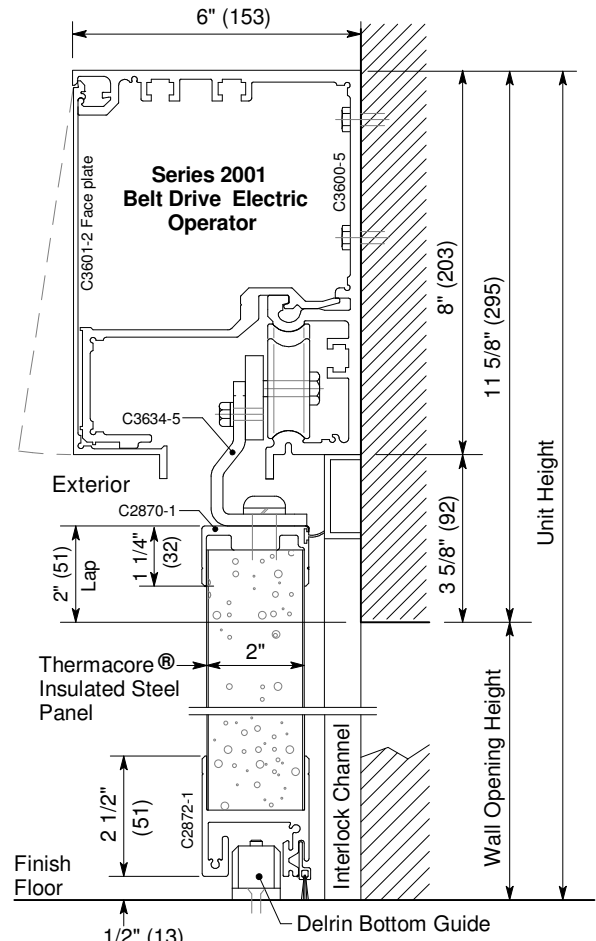

Vertical Section

Door shown in open position

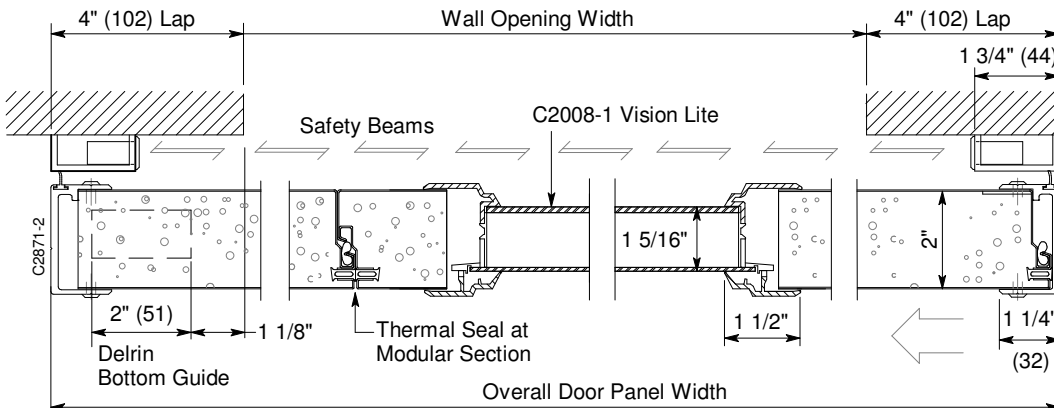

Horizontal Section

Type P-X shown, X-P opposite

Horton Automatics reserves the right to alter its product and specifications without notice. Dimensions given in U.S. inches followed by millimeters in parenthesis.