



® 4242 Baldwin Boulevard
 Corpus Christi, Texas
 USA 78405-3399
 Tel: 800-531-3111, 361-888-5591
 Fax: 800-531-3108, 361-888-6510
www.hortondoors.com
The Automatic Choice

ARCHITECTURAL DETAILS

INDUSTRIAL SLIDE DOORS

RapidSlide®

C2.1

Type: Single Slide P-X-X-P

Sept 16

Standard Packages


Wall Opening Width	Unit Width	Wall Opening Height	Unit Height
6'-0" (1829)	13'-5 1/2" (4102)	8'-0" (2438)	8'-11 5/8" (2733)
7'-0" (2134)	15'-5 1/2" (4711)	9'-0" (2743)	9'-11 5/8" (3038)
8'-0" (2438)	17'-5 1/2" (5321)	10'-0" (3048)	10'-11 5/8" (3343)
9'-0" (2743)	19'-5 1/2" (5931)	12'-0" (3658)	12'-11 5/8" (3953)
10'-0" (3048)	21'-5 1/2" (6540)		
12'-0" (3658)	25'-5 1/2" (7760)		

Overall Panel Width = Wall Opening Width + 4" (102)
Panel Finish : Alpine White, smooth baked on, polyester enamel paint.
Exposed Aluminum Finish : 204R1 Clear anodized.

Includes Single
 12" x 25" Vision Lite on
 Modular 24"
 Door Panel Section

Options:

- Stainless steel or anodized aluminum hood (p.C3.0)
- Power-Fail-Open or Power-Fail-Close
- UPS Battery Back-up
- Autolock (Fail-Safe or Fail-Secure)
- 1/4 HP Motor (in lieu of Std.1/8 HP)
- Additional Vision Lite
- Custom height & width

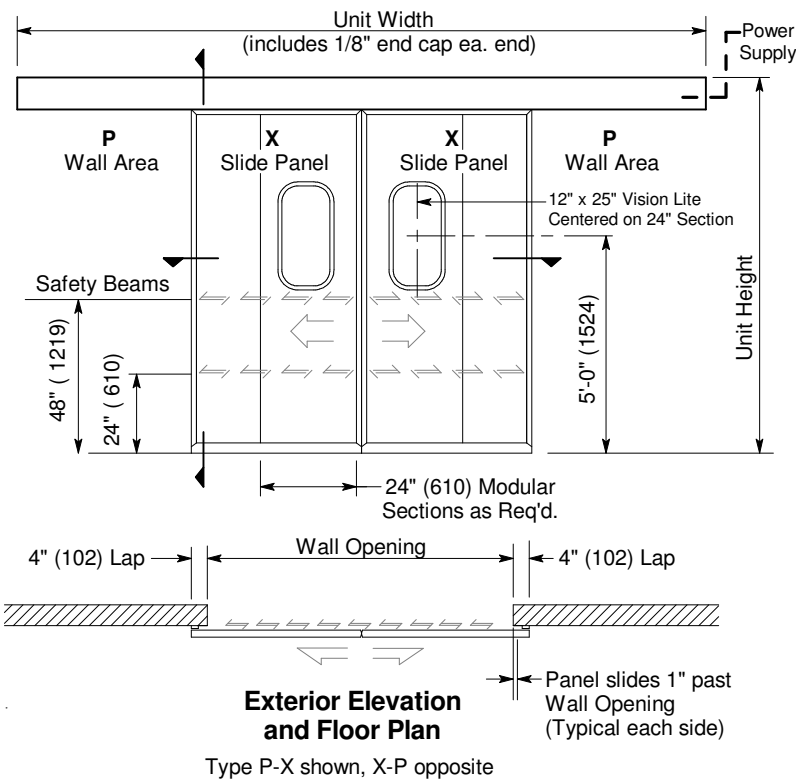



Installation and Operation

- Door unit is surface mounted onto exterior of finished wall. Finish floor not to exceed 1/4" out of level.
- Electrical: Provide 120 VAC, 60 cycle, single phase, 15 amp service (in conduit) to each unit on dedicated 20 amp circuit breaker routed to header. Maximum current draw is 3.15 amps.
- Actuator mounted on interior and exterior of opening for operation in each direction. Door opens 1" past wall opening. Door closes after time delay expires.

Actuators:

- Push Plate or overhead Motion Sensor

See Architectural Specs. starting on p. C5.0.

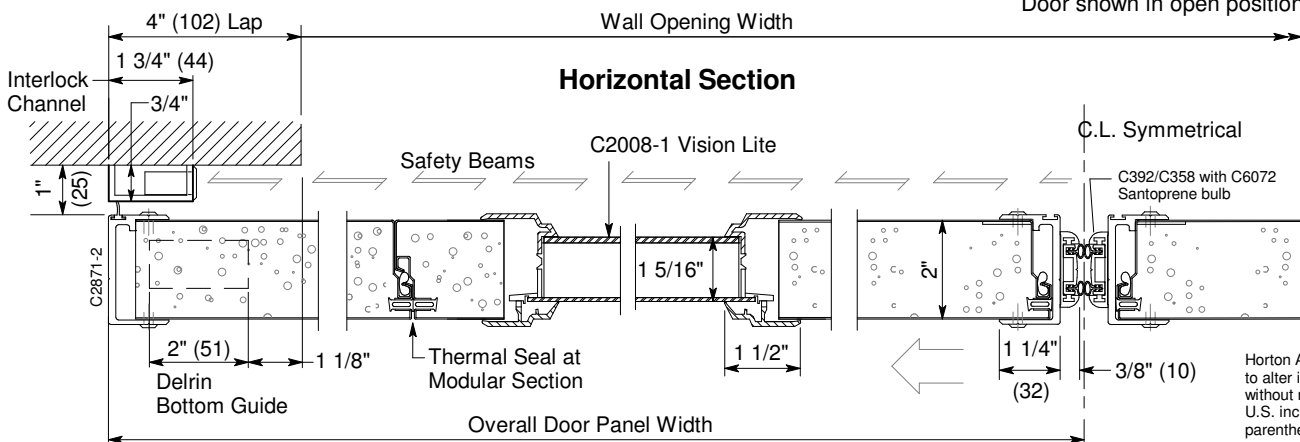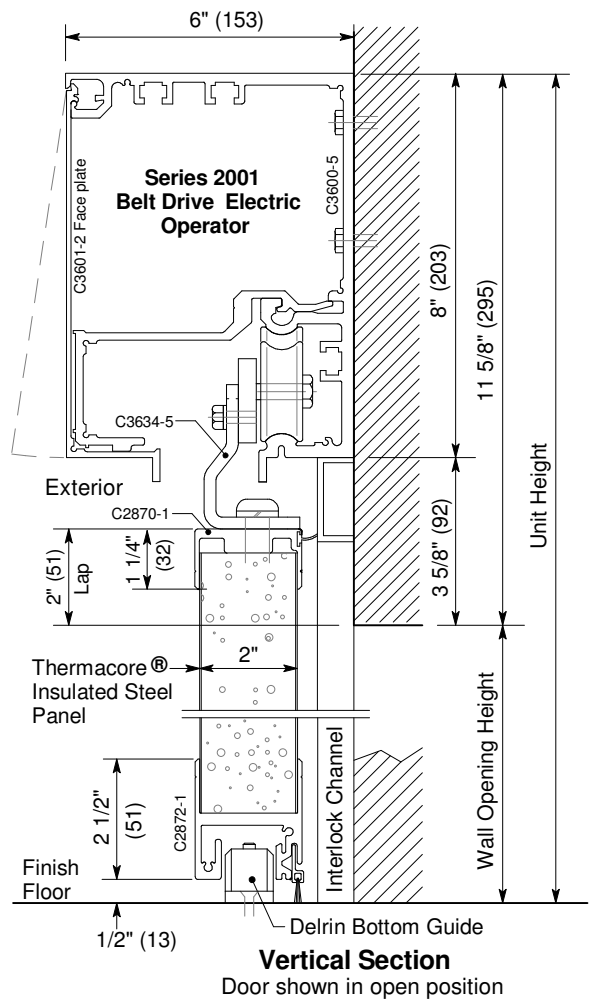

Horton Automatics reserves the right to alter its product and specifications without notice. Dimensions given in U.S. inches followed by millimeters in parenthesis.