


## Trackless Units

To obtain a full opening, doors must be in the swingout 90° position. This is accomplished in the following manner:

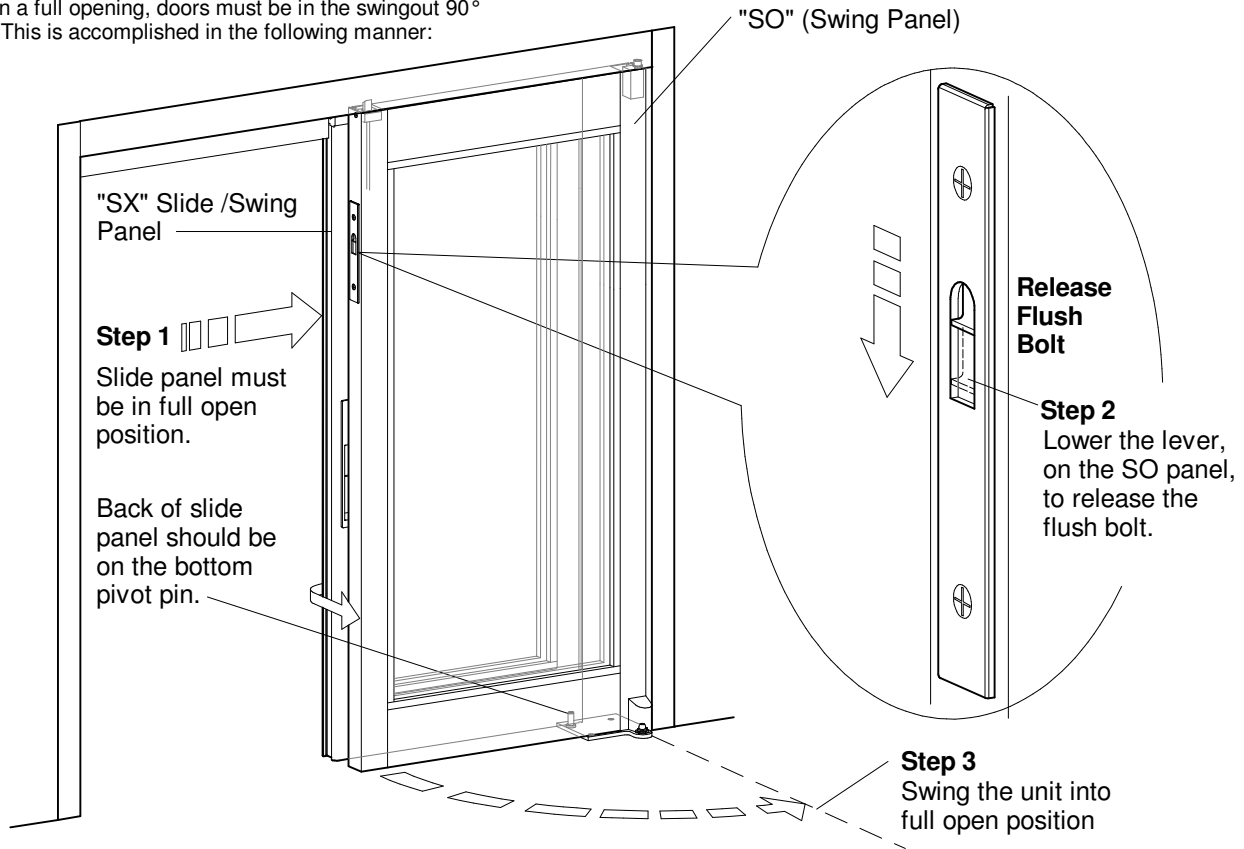

## Units with Floor Mounted Bottom Guides

These units can be swing out from any slide position.

### Step 2

Pull swing / slide panel "SX" to release the breakout/ball catch at the top of the door panel

For maximum opening, and ease of operation, put slide panel in full open position before breaking the panel out.

If the unit is equipped with optional positive latching, this handle will have to be rotated to release the latch or the door will not slide or swing out in the fully closed position.

