



® 4242 Baldwin Boulevard
 Corpus Christi, Texas
 USA 78405-3399
 Tel: 800-531-3111, 361-888-5591
 Fax: 800-531-3108, 361-888-6510
 www.hortondoors.com
 The Automatic Choice

GENERAL OPERATION


INDUSTRIAL SLIDE DOORS

Typical Activation

C1.1


Sept 16

Typical activation mounted on interior and exterior door of opening for operation in each direction. Door closes after time delay expires. All devices are 24VAC, class II circuit.

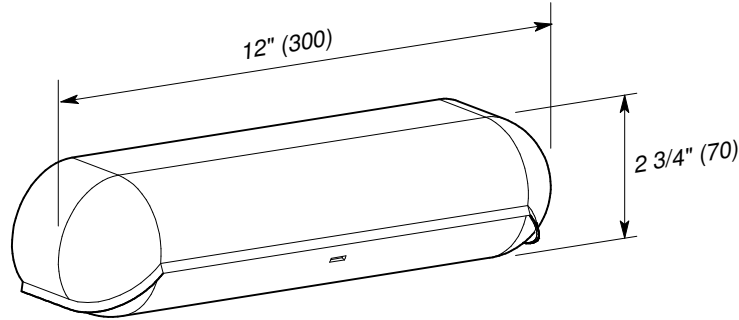

C1238 Overhead Mounted Motion Sensor

- Detection Method: Active infrared reflection
- Width and depth are individually adjustable

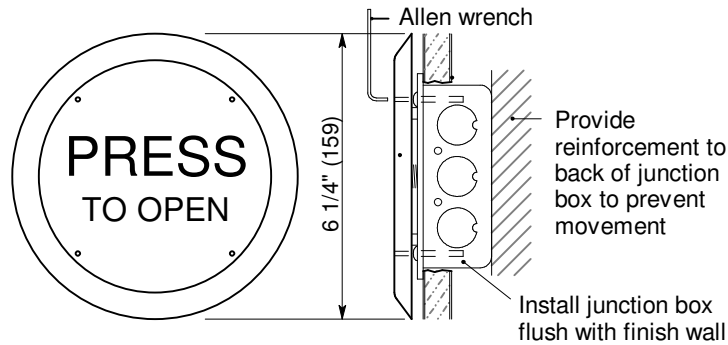

C1260-1 Push Plate Switch

6 1/4" (159) dia. brushed stainless steel push plate with momentary contact switch. Assembly is wall mounted to standard 4" x 4" x 1 1/2" junction box (not included).