



® 4242 Baldwin Boulevard
 Corpus Christi, Texas
 USA 78405-3399
 Tel: 800-531-3111, 361-888-5591
 Fax: 800-531-3108, 361-888-6510
 www.hortondoors.com
 The Automatic Choice


SPECIFICATION DETAILS

AUTOMATIC COMMERCIAL SLIDE DOORS

Standard Pushbar and Optional Rails

A5.4


Jan 08

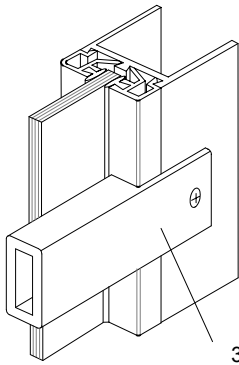

C278-1 Pushbars are sent loose & field mounted on interior side of breakout panels if no midrail is specified.


Can also serve as "crash bar" in grocery store applications when applied to exterior and/or interior.

3/4" (19) x 1 1/2" (38)

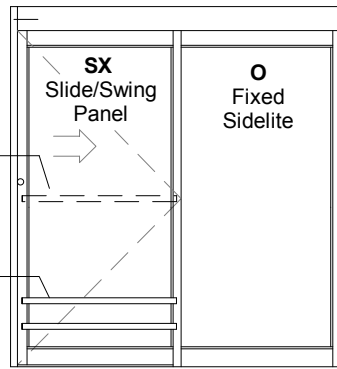


Standard Pushbar

Elevation

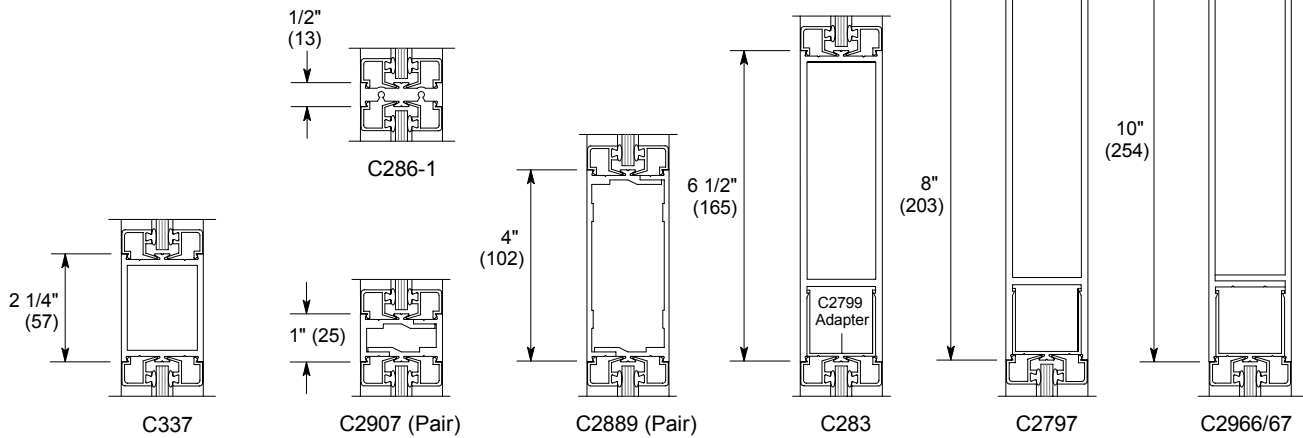

Optional Mid-Rails

Notes:
 Standard prep. for 1/4" (6) glazing shown using C338 1/2" (13) tall glass stops.

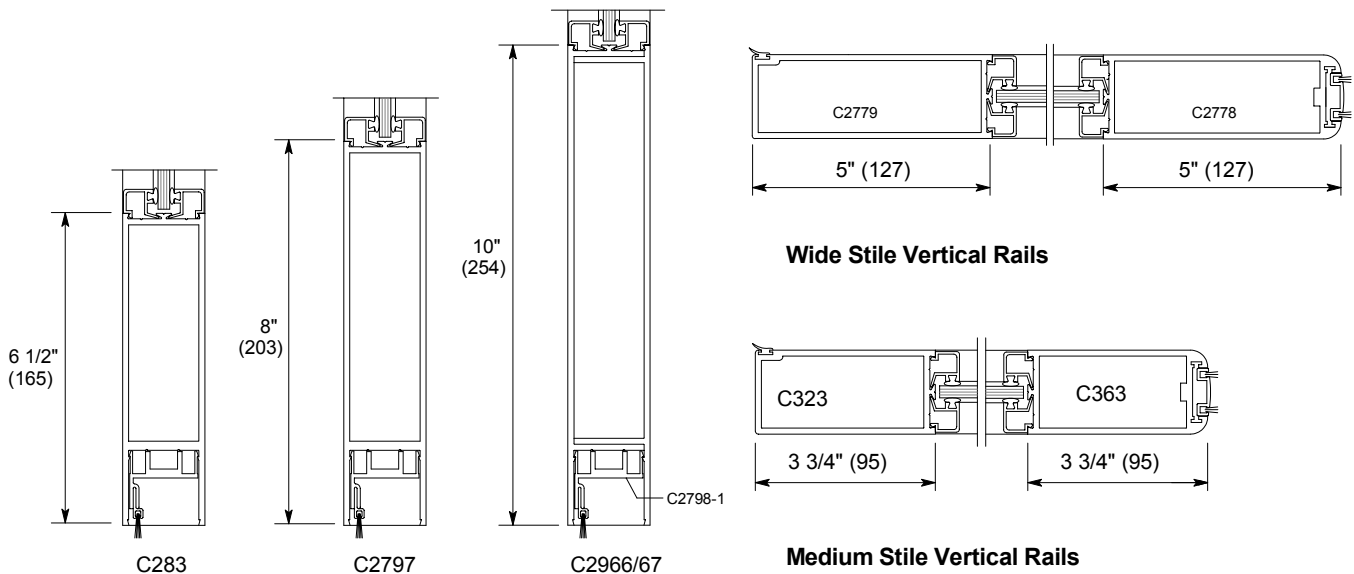

Optional Bottom Rails

Medium Stile Vertical Rails

Horton Automatics reserves the right to improve the product and change its specifications without notice. Dimensions given in U.S. Inches followed by Millimeters in parenthesis.